

Bengalla Mining Company Pty Limited A.B.N. 32 053 909 470



Bengalla Road, Muswellbrook Locked Mail Bag 5, Muswellbrook NSW 2333 Australia

Bengalla Mine

Environment Protection Licence 6538 Monthly Monitoring Data Summary

October 2015

Contents

1.	INTR	ODUCTION	1
2.	AIR (QUALITY	2
	2.1.	Total Suspended Particulates	2
	2.2.	Particulate Matter less than 10 Microns	4
	2.3.	Dust Deposition	6
3.	SUR	FACE WATER	9
	3.1.	Mine Water Discharge	9
4.	BLAS	STING	13
Tab	les		
Table	: 1: To	tal Suspended Particulates Monitoring Summary	3
		M ₁₀ Monitoring Summary	
Table	3: Du	st Deposition Monitoring Summary	7
Table	4: Bla	ast Monitoring Summary	14

1. INTRODUCTION

This document has been prepared to satisfy the requirements of Bengalla Mining Company Pty Limited's (BMC) Environment Protection Licence (EPL) 6538. The licence details are as follows:

License Holder: Bengalla Mining Company Pty Limited

Licence Number: 6538

Premises: Bengalla Mine

Bengalla Road via

Muswellbrook NSW 2333

Access to Licence: http://www.epa.nsw.gov.au/prpoeoapp/Detail.aspx?instid=6538&id=6538&

option=licence&searchrange=licence&range=POEO

licence&prp=no&status=Issued

Monitoring Locations: See main text and Appendix A

This document provides a summary of environmental monitoring data sampled as prescribed by EPL 6538 for October 2015 (reporting period). Monitoring data provided is as follows:

- Air quality, including total suspended particulates (TSP), particulate matter less than 10 microns (PM₁₀)
 and deposited dust matter;
- Surface water, including mine water discharge; and
- Blast vibration and overpressure.

2. AIR QUALITY

In accordance with Condition M2.2 of EPL 6538 and to monitor regional air quality, Bengalla Mine operates and maintains a network of five high volume air samplers (HVAS) measuring TSP, three HVAS measuring PM_{10} and 14 depositional dust gauges on land representative of private receivers surrounding its operations. Additional PM_{10} data is also sourced from Mt Arthur Coal through an information sharing agreement. The air quality monitoring network, as described, is shown in **Appendix A**.

2.1. Total Suspended Particulates

Pollutant	TSP
Unit of measure:	Micrograms per cubic metre (μg/m³)
Monitoring location:	See Table 1 and Appendix A
Monitoring frequency required by licence:	Every 6 days (24 hours)
Sampled:	26/09/15, 02/10/15, 08/10/15, 14/10/15, 20/10/15 External contractor sampling and reporting results for 26/09/2015 to be presented in this summary due to sample schedule.
Obtained:	12 November 2015
Published:	24 November 2015
Development consent limit:	Annual average 90 µg/m³

In accordance with Condition M2.2 of EPL 6538, TSP data (EPA Monitoring Point 3) for the reporting period is provided in Table 1.

Table 1: Total Suspended Particulates Monitoring Summary

Sampling point		No. of samples required by licence	No. of samples collected and analysed*	Minimum sample value	Maximum sample value	Monthly mean of samples	Annual rolling average
HV01	Wybong Road (East), Muswellbrook	5	5	39.3	63.4	52.6	49.3
HV02	Racecourse Road, Muswellbrook	5	5	44.9	89.2	68.1	59.0
HV03	Logues Lane, Muswellbrook	5	5	36.4	91.8	60.5	41.3
HV04	St James School, Muswellbrook	5	5	46.0	70.3	56.4	49.0
HV06	Wybong Road (West), Muswellbrook	5	5	76.4	176.0	122.9	73.5

^{*} External contractor sampling and reporting results for 26/09/2015 to be presented in this summary due to sample schedule.

For the reporting period, annual average TSP data were below the annual average Development Consent limit of 90 µg/m³.

2.2. Particulate Matter less than 10 Microns

Pollutant PM_{10} Micrograms per cubic metre (µg/m3) Unit of measure: **Monitoring location:** See Table 2 and Appendix A Monitoring frequency required by licence: Every 6 days (24 hours) Sampled: 26/09/15, 02/10/15, 08/10/15, 14/10/15, 20/10/15 External contractor sampling and reporting results for 26/09/2015 to be presented in this summary due to sample schedule. Obtained: 12 November 2015 Published: 24 November 2015 Annual average 30 µg/m³ **Development consent limit:** 24-hour average 50 µg/m³

In accordance with Condition M2.2 of EPL 6538, PM10 data (EPA Monitoring Point 4) for the reporting period is provided in Table 2.

Table 2: PM₁₀ Monitoring Summary

Sampling point		No. of samples required by licence	No. of samples collected and analysed*	Minimum sample value	Maximum sample value	Monthly mean of sample	Annual rolling average
PM ₁₀ - 1	Racecourse Road, Muswellbrook	5	5	17.3	30.5	26.7	21.3
PM ₁₀ - 2	St James School, Muswellbrook	5	5	17.2	30.9	23.7	20.5
PM ₁₀ - 3	Mt Arthur Coal Residence, Muswellbrook [†]	5	5	27.0	44.0	33.6	21.3
PM ₁₀ - 4	Wybong Road (West), Muswellbrook	5	5	26.1	49.4	36.7	23.9

^{*} External contractor sampling and reporting results for 26/09/2015 to be presented in this summary due to sample schedule.

For the reporting period, annual average PM₁₀ data were below the Development Consent limit of 30 µg/m³.

[†] Data sourced from Mt Arthur Coal

2.3. Dust Deposition

Pollutant Particulates – deposited matter

Unit of measure: Grams per square metre per month (g/m²/month)

Monitoring location: See Table 3 and Appendix A

Monitoring frequency required by licence:

Once a month (minimum of 4 weeks)

Sampling period: 24 September 2015 – 23 October 2015

Obtained: 12 November 2015

Published: 24 November 2015

Development consent limit: Annual average 4 g/m²/month

In accordance with Condition M2.2 of EPL 6538, dust deposition data (EPA Monitoring Point 5) is provided in Table 3.

Table 3: Dust Deposition Monitoring Summary

	Sampling point	No. of samples required by licence	No. of samples collected and analysed	Measured value	Observations	Annual rolling average
D01	Queen Street, Muswellbrook	1	1	1.1		1.0
D02	King Street, Muswellbrook	1	1	1.8		1.3
D04A	Industrial Estate, Muswellbrook	1	1	2.7		2.2
D05	Intersection Kayuga and Wybong Road, Muswellbrook	1	1	1.7		1.3
D06	Logues Lane, Muswellbrook	1	1	1.7		2.4
D07A	St James School, Muswellbrook	1	1	2.6		1.8
D08	Denman Road, Muswellbrook	1	1	1.8		1.6
D09	Wybong Road, Muswellbrook	1	1	1.9		1.3
D10	Racecourse Road, Muswellbrook	1	1	2.8		2.0
D20	Wyndams Arms R.O.W., Muswellbrook	1	1	3.9		3.3
D23B	Logues Lane, Muswellbrook	1	1	1.2		1.6
D25	Roxburgh Road, Muswellbrook	1	1	3.3		3.2
D26	Wybong Road, Muswellbrook	1	1	2.4		1.4
DA	Roxburgh Road, Muswellbrook	1	1	3.5		3.4

⁽c) Sample contaminated. Results for contaminated gauges are not included in the calculation of the annual averages. Note: D22 awaiting relocation.

⁻ Sample unable to be collected.

Dust deposition samples can be contaminated by a variety of means, notably by the presence of insects and bird droppings. Results for contaminated gauges are not included in the calculation of the annual averages for the reporting period.

The Australian Standard does not provide criteria for the determination of contamination of a dust deposition sample. In this regard, a dust deposition sample is determined to be contaminated if it meets at least three of the following criteria:

- 1. Contents gauge contains organic matter or bird droppings;
- 2. Water colour/turbidity gauge water is coloured and turbid;
- 3. Ash to insoluble ratio <50% or <70% for gauges within close proximity to mining operations; or
- 4. ARA comparison insoluble result is higher than the annual rolling average.

For the reporting period, annual average dust deposition data were below the annual average Development Consent limit of 4 g/m²/month.

3. SURFACE WATER

Pollutant

3.1. Mine Water Discharge

Bengalla Mine participates in the Hunter River Salinity Trading Scheme (HRSTS). In accordance with Condition P1, M2.3 and M7 of EPL6538, Bengalla Mine maintains two monitoring locations to measure concentration, volume and mass of mine water discharges.

The location of these monitoring points is provided in **Appendix A**.

Unit of measure:	Megalitres per day (ML/day)
Volume/mass limit:	200 ML/day
(Condition L3) Monitoring location:	EPA Monitoring Identification Point 1 (EPA01) – Outlet pipe from 280 ML HRSTS storage dam
	See Appendix A
Monitoring frequency required by licence:	Continuous during all discharge events
Sampling period:	Not applicable. During the reporting period, Bengalla Mine did not discharge any mine water under the HRSTS.
Obtained:	Not applicable
Published:	24 November 2015

Mine water

Pollutant	Conductivity
Unit of measure:	Microsiemens per centimetre (µS/cm)
Monitoring location:	EPA Monitoring Identification Point 1 (EPA01) – Outlet pipe from 280 ML HRSTS storage dam
	EPA Monitoring Identification Point 2 (EPA02) – Downstream of Discharge Point 1 in Dry Creek
	See Appendix A
Monitoring frequency required by licence:	Continuous during all discharge events
Sampling period:	Not applicable. During the reporting period, Bengalla Mine did not discharge any mine water under the HRSTS.
Obtained:	Not applicable
Published:	24 November 2015

Pollutant	рН
Unit of measure:	рН
pH limit: (Condition L2)	6.5 – 9.5 (100 th percentile)
Monitoring location:	EPA Monitoring Identification Point 1 (EPA01) – Outlet pipe from 280 ML HRSTS storage dam
	EPA Monitoring Identification Point 2 (EPA02) – Downstream of Discharge Point 1 in Dry Creek
	See Appendix A
Monitoring frequency required by licence:	Daily during all discharge events
Sampling period:	Not applicable. During the reporting period, Bengalla Mine did not discharge any mine water under the HRSTS.
Obtained:	Not applicable
Published:	24 November 2015

Pollutant	Total suspended solids (TSS)
Unit of measure:	Milligrams per litre (mg/L)
Total suspended solids limit: (Condition L2)	120 mg/L (100 th percentile)
Monitoring location:	EPA Monitoring Identification Point 1 (EPA01) – Outlet pipe from 280 ML HRSTS storage dam
	EPA Monitoring Identification Point 2 (EPA02) – Downstream of Discharge Point 1 in Dry Creek
	See Appendix A
Monitoring frequency required by licence:	Daily during all discharge events
Sampling period:	Not applicable. During the reporting period, Bengalla Mine did not discharge any mine water under the HRSTS.
Obtained:	Not applicable
Published:	24 November 2015

4. BLASTING

In accordance with the requirements of Condition M8 of EPL 6538, Bengalla Mine maintains a network of three blast monitors on private (non-mine owned) land to measure air-blast overpressure and ground vibration for all blasts events undertaken by the operation. The location of these monitors is provided in **Appendix A**.

Overpressure limits: (Condition L4)

- a) 115 linear decibels (dB(L)) for more than 5% of the total number of blasts carried out on the premises within the 12 months annual reporting period; and
- b) 120 dB(L) at any time

Ground vibration limits: (Condition L4)

- a) exceed 5 millimetres/second (mm/s) for more than 5% of the total number of blasts carried out on the premises within the 12 months annual reporting period; and
- b) 10mm/s at any time

Sampled: 1 - 31 October 2015

Obtained: 1 – 31 October 2015

Published: 24 November 2015

In accordance with Condition M8 of EPL 6538, overpressure and ground vibration data is provided in Table 4.

Table 4: Blast Monitoring Summary

Sampling point	Pollutant	Unit of measure	No. of samples required by licence	No. of samples collected and analysed	Minimum value	Maximum value	Mean of samples
Blake	Overpressure	dB(L)	All blast events	17	80.90	97.80	91.50
Diake	Ground vibration	mm/s	All blast events	17	0.01	0.44	0.21
St James School	Overpressure	dB(L)	All blast events	17	70.50	98.30	89.13
St James School	Ground vibration	mm/s	All blast events	17	0.00	0.23	0.09
Moore	Overpressure	dB(L)	All blast events	17	74.50	102.90	96.87
ivioore	Ground vibration	mm/s	All blast events	17	0.00	3.52	1.12

For the reporting period, overpressure and ground vibration data were below the maximum limit and within the 5% allowance limit specified in Condition L4 of EPL 6538.

Appendix A

EPL 6538 Monitoring Locations

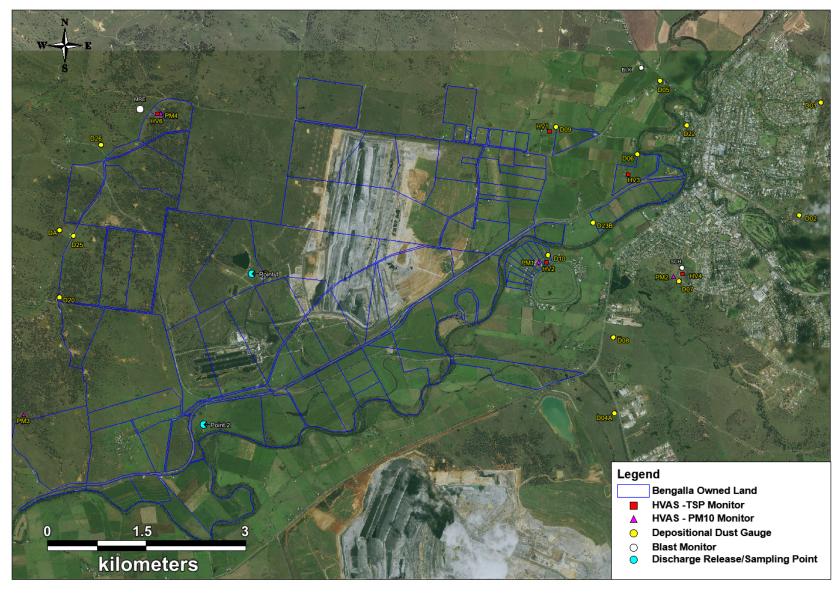


Figure 1: EPL 6538 Monitoring Locations